

# TDOEIA840M-AI

8MP IR Vari-focal Eyeball Network Camera



- 8-MP 1/2.7" CMOS image sensor, low luminance, and high definition image.
- Outputs max. 8 MP (3840 × 2160)@20 fps and supports 2688 × 1520 (2688 × 1520)@25/30 fps.
- H.265 codec, high compression rate, ultra-low bit rate.
- Built-in IR LED, and the max. illumination distance is 40 m.
- ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments.
- Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes.
- Intelligent monitoring: Intrusion, tripwire (the two functions support the classification and accurate detection of vehicle and human).
- Abnormality detection: Motion detection, video tampering, audio detection, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, and voltage detection.
- Supports max. 256 G Micro SD card; built in MIC.
- 12 VDC/PoE power supply, easy for installation.
- IP67 protection.
- SMD Plus.

## Functions

### SMD Plus


With intelligent algorithm, Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

### Smart H.265+ & Smart H.264+

With advanced scene-adaptive rate control algorithm, smart encoding technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

### Perimeter Protection

With deep learning algorithm, Perimeter Protection technology can recognize human and vehicle accurately. In restricted area (such as pedestrian area and vehicle area), the false alarms of intelligent detection based on target type (such as tripwire, intrusion) are largely reduced.



### WDR

With advanced Wide Dynamic Range (WDR) technology, network camera provides clear details in the environment of strong brightness contrast. The bright and dark area can get clear video even in high brightness environment or with backlight shadow.

### Cyber Security

Network cameras employ a series of security technologies, including security authentication and authorization, access control protocols, trusted protection, encrypted transmission and encrypted storage. These technologies improve the camera's defense against external cyber threats and prevent malicious programs from compromising the device.

### Protection (IP67, Wide Voltage)

**IP67:** The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can work normally after soaking in 1 m deep water for 30 minutes.

**Wide voltage:** The camera allows  $\pm 30\%$  (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

## Technical Specification

### Camera

|                            |   |
|----------------------------|---|
| Image Sensor               | 1/2.7" CMOS   |
| Max. Resolution            | 3840 (H) × 2160 (V)   |
| ROM                        | 128 MB  |
| RAM                        | 256 MB  |
| Scanning System            | Progressive   |
| Electronic Shutter Speed   | Auto/Manual 1/3 s–1/100,000 s   |
| Min. Illumination          | 0.008 lux@F1.5 (Color, 30 IRE)<br>0.0008 lux@F1.5 (B/W, 30 IRE)<br>0 lux (Illuminator on) |
| S/N Ratio                  | >56 dB  |
| Illumination Distance      | 40 m (131.23 ft) (IR)   |
| Illuminator On/Off Control | Auto; Manual  |
| Illuminator Number         | 2 (IR LED)  |
| Pan/Tilt/Rotation Range    | Pan: 0°–360°<br>Tilt: 0°–78°<br>Rotation: 0°–360°   |

### Lens

|                      |                                      |
|----------------------|--------------------------------------|
| Lens Type            | Motorized vari-focal                 |
| Lens Mount           | φ14                                  |
| Focal Length         | 2.7 mm–13.5 mm                       |
| Max. Aperture        | F1.5                                 |
| Field of View        | H: 113°–31°; V: 58°–18°; D: 138°–36° |
| Iris Control         | Fixed                                |
| Close Focus Distance | 0.8 m (2.62 ft)                      |

| DORI Distance | Lens | Detect                 | Observe                | Recognize             | Identify             |
|---------------|------|------------------------|------------------------|-----------------------|----------------------|
|               | W    | 85.3 m<br>(279.86 ft)  | 34.1 m<br>(111.88 ft)  | 17.1 m<br>(56.10 ft)  | 8.5 m<br>(27.89 ft)  |
|               | T    | 280.0 m<br>(918.64 ft) | 112.0 m<br>(367.45 ft) | 56.0 m<br>(183.73 ft) | 28.0 m<br>(97.86 ft) |

\*DORI (Detect, Observe, Recognize, Identify) is a standard system for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/project design tool.

### Intelligence

|                            |   |
|----------------------------|---|
| IVS (Perimeter Protection) | Intrusion, tripwire (the two functions support the classification and accurate detection of vehicle and human)  |
| Smart Search               | Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos |

### Video

|                   |  |
|-------------------|--|
| Video Compression | H.265; H.264; H.264H; H.264B; MJPEG (Only supported by the sub stream) |
| Smart Codec       | Smart H.265+; Smart H.264+   |

|                          |   |
|--------------------------|---|
| Video Frame Rate         | Main stream: 3840 × 2160@(1–20 fps)/2688 × 1520@(1–25/30 fps)<br>sub stream: 704 × 576@(1–25 fps)/704 × 480@(1–30 fps)<br>*The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.   |
| Stream Capability        | 2 streams   |
| Resolution               | 3840 × 2160 (3840 × 2160); 3072 × 2048 (3072 × 2048); 3072 × 1728 (3072 × 1728); 2880 × 1620 (2880 × 1620); 2688 × 1520 (2688 × 1520); 3M (2048 × 1536); 2304 × 1296 (2304 × 1296); 1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240) |
| Bit Rate Control         | CBR/VBR   |
| Video Bit Rate           | H.264: 32 kbps–8192 kbps<br>H.265: 12 kbps–8192 kbps  |
| Day/Night                | Auto(ICR)/Color/B/W   |
| BLC                      | Yes   |
| HLC                      | Yes   |
| WDR                      | 120 dB  |
| White Balance            | Auto; natural; street lamp; outdoor; manual; regional custom  |
| Gain Control             | Auto; Manual  |
| Noise Reduction          | 3D NR   |
| Motion Detection         | OFF/ON (4 areas, rectangular)   |
| Region of Interest (RoI) | Yes (4 areas)   |
| Smart Illumination       | Yes   |
| Image Rotation           | 0°/90°/180°/270° (Support 90°/270° with 2688 × 1520 resolution and lower)   |
| Mirror                   | Yes   |
| Privacy Masking          | 4 areas   |
| Audio                    |   |
| Built-in MIC             | Yes   |
| Audio Compression        | G.711a; G.711Mu; PCM; G.726   |
| Alarm                    |   |
| Alarm Event              | No SD card; SD card full; SD card error; network disconnection; IP conflict; illegal access; motion detection; video tampering; tripwire; intrusion; audio detection; voltage detection; defocus detection; SMD; security exception   |
| Network                  |   |
| Network Port             | RJ-45 (10/100 Base-T)   |
| SDK and API              | Yes   |
| Network Protocol         | IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; PPPoE; Bonjour  |
| Interoperability         | ONVIF (Profile S/Profile G/Profile T); CGI; P2P; Milestone  |
| User/Host                | 20 (Total bandwidth: 48 M)  |
| Storage                  | FTP; SFTP; Micro SD card (support max. 256 GB); NAS   |

|                     |   |
|---------------------|---|
| Browser             | IE; Chrome; Firefox   |
| Management Software | Smart PSS; DSS; DMSS  |
| Mobile Client       | iOS; Android  |
| Cyber Security      | Configuration encryption; trusted execution; Digest; security logs; WSSE; account lockout; syslog; video encryption; 802.1x; IP/MAC filtering; HTTPS; trusted upgrade; trusted boot; firmware encryption; generation and importing of X.509 certification |

**Certification**

|                |  |
|----------------|--|
| Certifications | CE-LVD: EN62368-1;<br>CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU;<br>FCC: 47 CFR FCC Part 15, Subpart B;<br>UL/CUL: UL62368-1 & CAN/CSA C22.2 No. 62368-1-14 |
|----------------|--|

**Power**

|                   |  |
|-------------------|--|
| Power Supply      | 12 VDC/PoE (802.3af)   |
| Power Consumption | Basic: 2.8 W (12 VDC); 3.6 W (PoE)<br>Max. (H.265+ max. resolution + max. stream+ WDR + IR intensity + IVS): 6.4 W (12 VDC); 7.6 W (PoE) |


**Environment**

|                       |                                      |
|-----------------------|--------------------------------------|
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) |
| Operating Humidity    | ≤95%                                 |
| Storage Temperature   | -40 °C to +60 °C (-40 °F to +140 °F) |
| Storage Humidity      | ≤95%                                 |
| Protection            | IP67                                 |

**Structure**

|                    |                                     |
|--------------------|-------------------------------------|
| Casing Material    | Metal                               |
| Product Dimensions | 108.3 mm × Φ122 mm (4.26" × Φ4.80") |
| Net Weight         | 0.70 kg (1.54 lb)                   |
| Gross Weight       | 0.88 kg (1.94 lb)                   |

**Dimensions (mm[inch])**

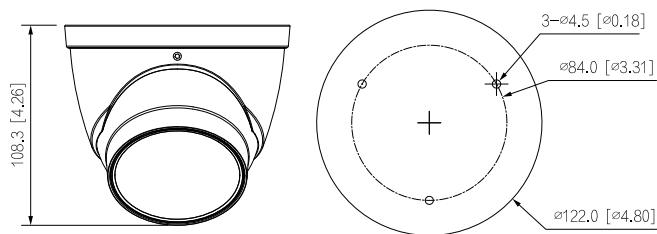

**Ordering Information**

| Type                   | Model         | Description                              |
|------------------------|---------------|--|
| 8MP Camera             | TDOEIA840M-AI | 8MP IR Vari-focal Eyeball Network Camera |
| Accessories (Optional) | PFA130-E      | Water-proof Junction Box                 |
|                        | PFB205W       | Wall Mount Bracket                       |
|                        | PFA152-E      | Pole Mount Bracket                       |
|                        | PFA106        | Mount Adapter                            |
|                        | PFB220C       | Ceiling Mount Bracket                    |

**Accessories**

Optional:



PFA130-E  
Water-proof  
Junction Box



PFB205W  
Wall Mount  
Bracket



PFA152-E  
Pole Mount  
Bracket



PFA106  
Mount  
Adapter



PFB220C  
Ceiling Mount  
Bracket

